


IT-IEM22

21.5 inches P-CAP Touch Screen Monitor



IT-IEM22

Slim, Durable and
Space-Saving




21.5" Full Flat Touch Screen LCD with
7H Hardness Durable Glass




Features

Vivid Color Portrait and Landscape View Support

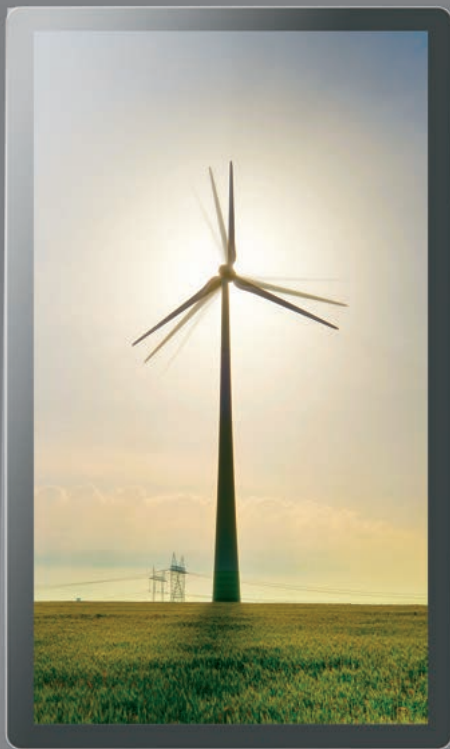


100 x 100 mm VESA Mount

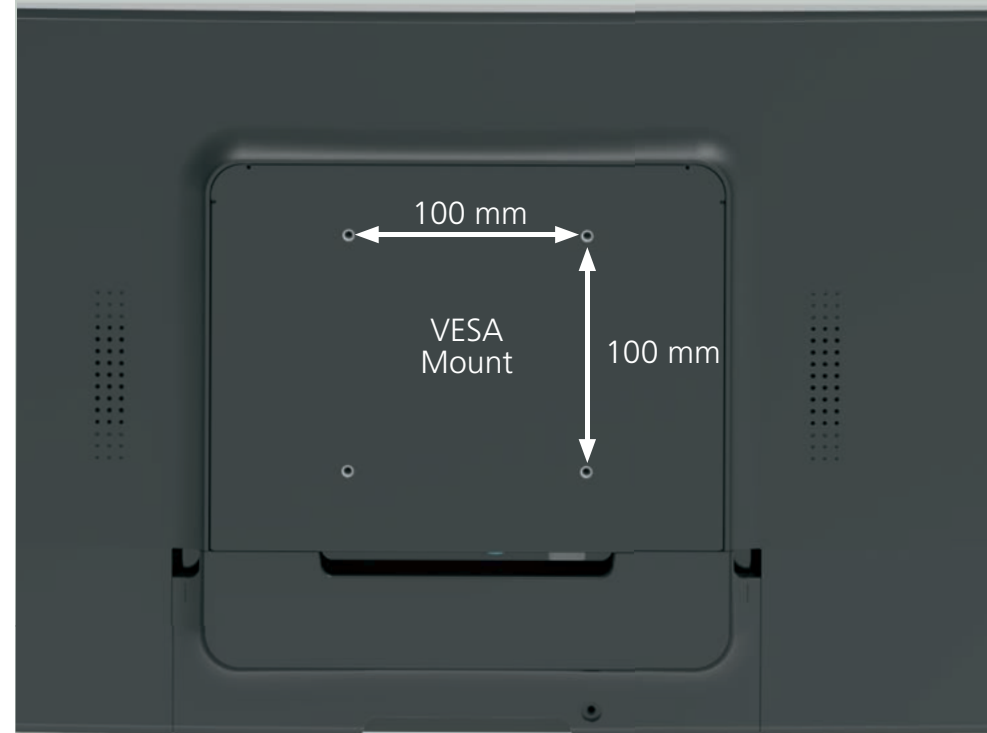

Specification

IT-IEM22	
Size	21.5" TFT LCD
Maximum Resolution	1920 x 1080
Contrast Ratio	1000:1
Brightness	250 nits (No Touch), 225 nits (P-CAP)
View Angle	H:178°, V:178°
Touch LCD Display	
Touch Type	Projected Capacitive
Touch points	10 points Touch
Touch Screen Interface	USB-HID
Display Surface	7H Hardness durable glass
I/O Port	
RJ-11	1 x RJ11 (for Remote Key)
USB Port	1 x USB Type C (Alt Mode for DP video support)
Video Port	1 x VGA, 1 x DP, 1 x HDMI (up to 1920 x 1080 @60Hz)
Audio Port	1 x Audio-Input (3.5 mm Mini-Jack)
Power Input	1 x DC In 12V Jack Power Input
Physical Properties	
Speaker	2 x 2W Stereo
Power Supply	50W (12VDC/4.16A) External AC Power Adaptor (100VAC ~240VAC, 50/60Hz)
Housing Color	Black
Material	Plastic, Glass, SECC Metal
Dimensions (W x H x D) mm	510.96 x 308.01 x 37.90 mm
Net Weight (kg)	4.04 kg
Gross Weight (kg)	6.40 kg
Carton (W x H x D) mm	610 x 405 x 160 mm
VESA	100 x 100 mm
Safety	
	CE, FCC, LVD, RoHS
Environment	
Operating Temperature / Operating Humidity	0°C ~ 40°C, 20% ~ 80% RH. Non-Condensing
Storage Temperature / Storage Humidity	-20°C ~ 60°C, 10% ~ 90% RH. Non-Condensing

Interfaces

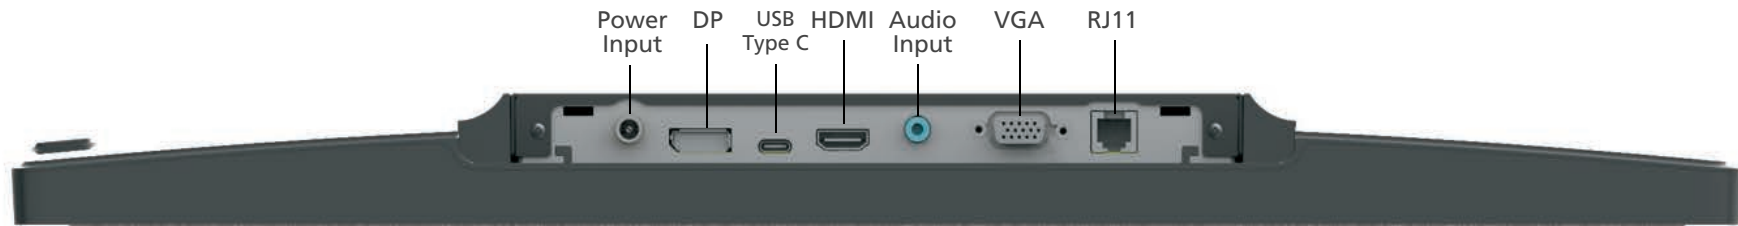

Dimensions

IT-IEM22

